


### Product Characters

Rated Invert Capacity [Nature Cooling]	5KVA	Rated Invert Capacity [Water Cooling]	9KVA
Battery Current Limit	200A	Control Method	FOC SVPWM
Communication Mode	CANBUS & RS232	Protection Level	IP65
Environment Temperature	-40°C ~ 55°C	Total Weight	3.0Kg
Protection Function	Voltage Monitor, Over Current, Over Temperature, Regen Monitor Etc. All parameters could be set by app or special software.		


### Order Infomation

AE22155.72600.XXXXXX



# AE2215



## 5KW PMSM DRIVER

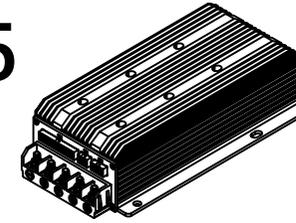




- FOC Control
- SVPWM SINEWAVE
- DTC & MTPA
- Excellent Surge Control
- CANBUS Default
- OBD Supported
- 100% Aging test

### Built-in Motor or Hub Motor

Rated Range 3.0~5.0KW

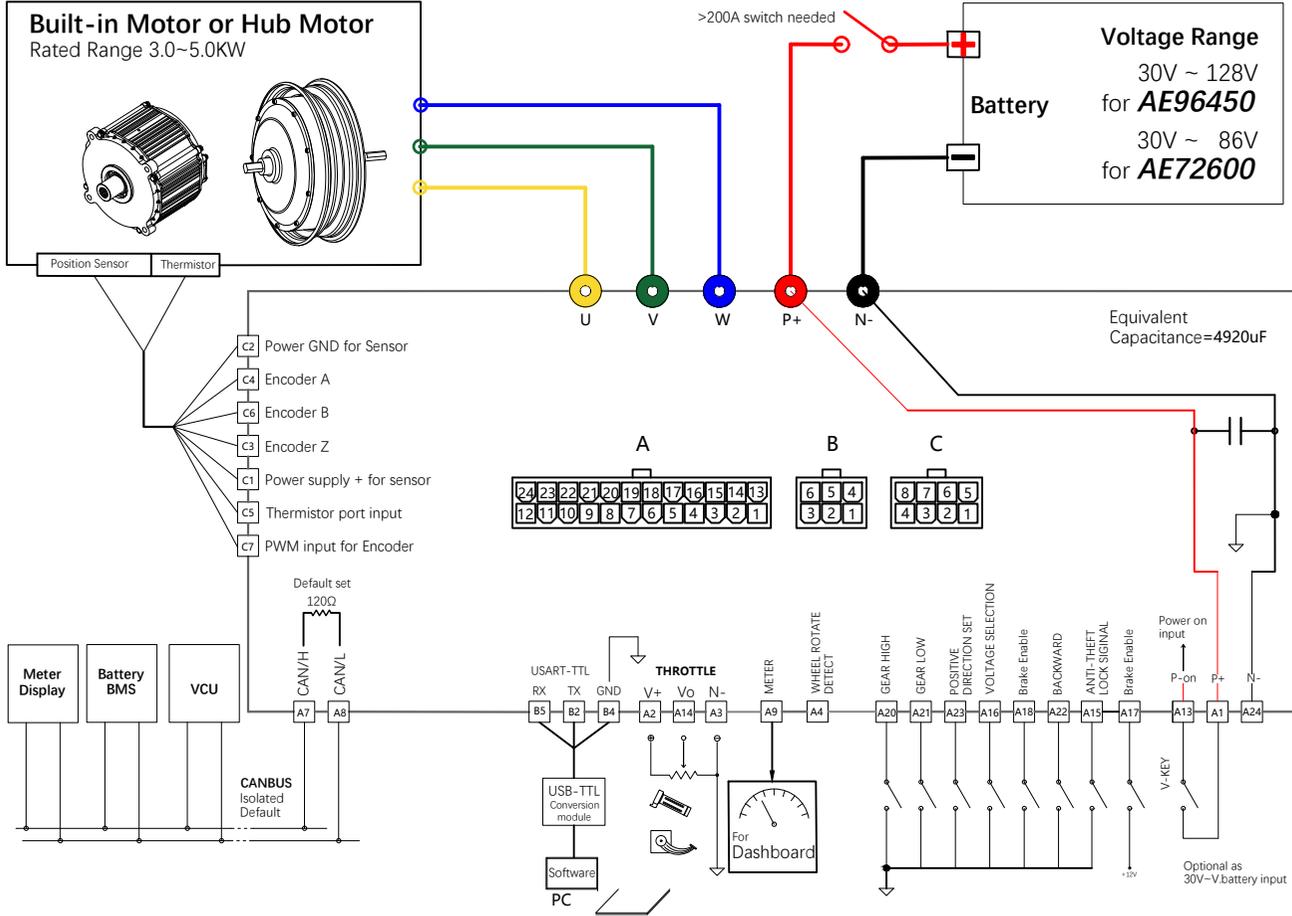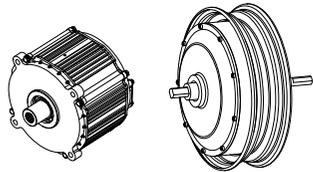

Dimension unit: mm

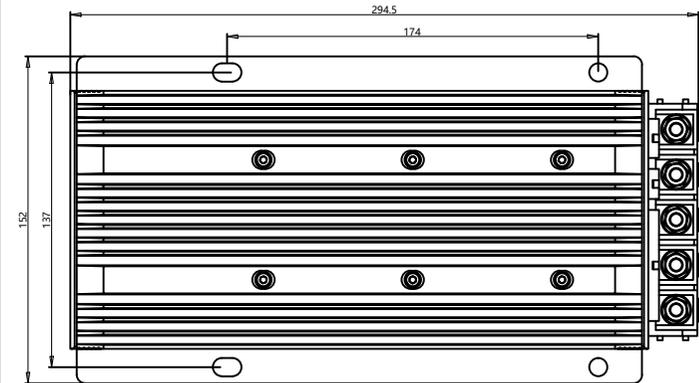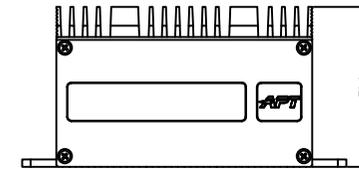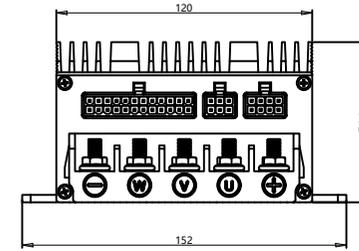

Note: For more detailed technical parameters, port specifications, software configuration and other information, please contact the company's salesman to obtain the manuals.

REV.	DATE	DE.	APR.	UPDATE RECORD	TOLERANCE SIZE LEVEL A	TOLERANCE SIZE LEVEL A	SCALE	DESIGN	REVIEWER	APPROVAL	NAME	SPECIFICATION OF AE2215.5KW	
					~> 10 ±0.15 BEND	250~> 500 ±0.7							
					10~> 150 ±0.3	500~> 1000 ±1.0							
					150~> 250 ±0.5	1000~> 2000 ±1.5							
1				2			5					1	1